
Type 3 Spacer

**Blank Flange** 



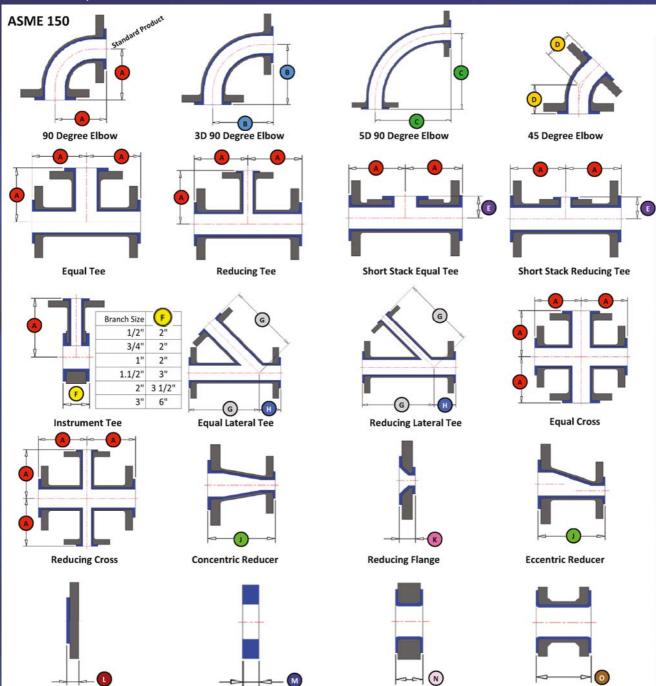

		FILL	E. 481										A PARTY OF THE PAR			
Nominal Bore	Α	В	С	D	E	G	н	J	К	L	M Max.	N Max.	O Max.	Van Stone Spool Min.	Fixed/ Rotating Spool Min.	Spool Max.
1/2"	2 9/16"*									35/64"	1.0"	2 3/8"	4.0"	10.0"	3.5"	20.0′
3/4"	3.0"								1 3/16"	19/32"	1.0"	2 3/8"	4.0"	10.0"	3.5"	20.0′
1"	3.5"	n/a	5.0"	1.75"	1 3/16"	5.75"	1.75"	-	1 3/16"	5/8"	1.0"	2 3/8"	4.0"	10.0"	3.5"	20.0′
1 1/2"	4.0"	4.5"	7.5"	2.25"	1 29/64"	7.0"	2.0"	4.5"	1 3/16"	3/4"	1.0"	2 3/8"	4.0"	10.0"	4.0"	20.0′
2"	4.5"	6.0"	10.0"	2.5"	1 11/16"	8.0"	2.5"	5.0"	1 3/16"	53/64"	1.0"	2 3/4"	6.0"	10.0"	4.5"	20.0′
3"	5.5"	9.0"	15.0"	3.0"	2 13/64"	10.0"	3.0"	6.0"	1 3/8"	1 1/32"	1.0"	2 3/4"	6.0"	10.0"	5.0"	20.0′
4"	6.5"	12.0"	20.0"	4.0"	2 41/64"	12.0"	3.0"	7.0"	1 3/8"	1 1/32"	1.0"	2 3/4"	6.0"	10.0"	5.0"	20.0′
6"	8.0"	18.0"	30.0"	5.0"	4 9/64"	14.5"	3.5"	9.0"	1 9/16"	1 1/16"	1.0"	3 5/32"	6.0"	20.0"	5.5"	20.0′
8"	9.0"	24.0"	40.0"	5.5"	4 59/64"	17.5"	4.5"	11.0"	1 9/16"	1 7/32"	1.0"	3 5/32"	8.0"	20.0"	6."	10.0′
10"	11.0"	30.0"	50.0"	6.5"	6 1/2"	20.5"	5.0"	12.0"	1 3/8"	1 17/64"	1.0"	3 5/32"	8.0"	n/a	6.5"	10.0′
12"	12.0"	36.0"	60.0"	7.5"	7 1/2"	24.5"	5.5"	14.0"	1 9/16"	1 11/32"	1.0"	3 5/32"	8.0"	n/a	7.0"	10.0′
14"	14.0"	-	-	7.5"	8 17/64"	-	-	16.0"	1 9/16"	1 29/64"	1.0"	3 5/32"	8.0"	n/a	7.5"	10.0′

Type 1 Spacer

Type 2 Spacer

<sup>\*</sup> Please note that 1/2" 90 Degree elbow is 4.0". The face to face Dimensions od reducing fittings is normally defined by the nominal bore of the larger size. Special dimensions are available upon request. For further information please go to our website at www.crp.co.uk or call us on +44(0)1706 756400. Please note, no warranties are given on the accuracy of the data, which may be subject to revision, for confirmation please refer to the appropriate standards documents. CRP's dimensions may vary from those of other manufacturers and not all components dimensioned are standard CRP products.