



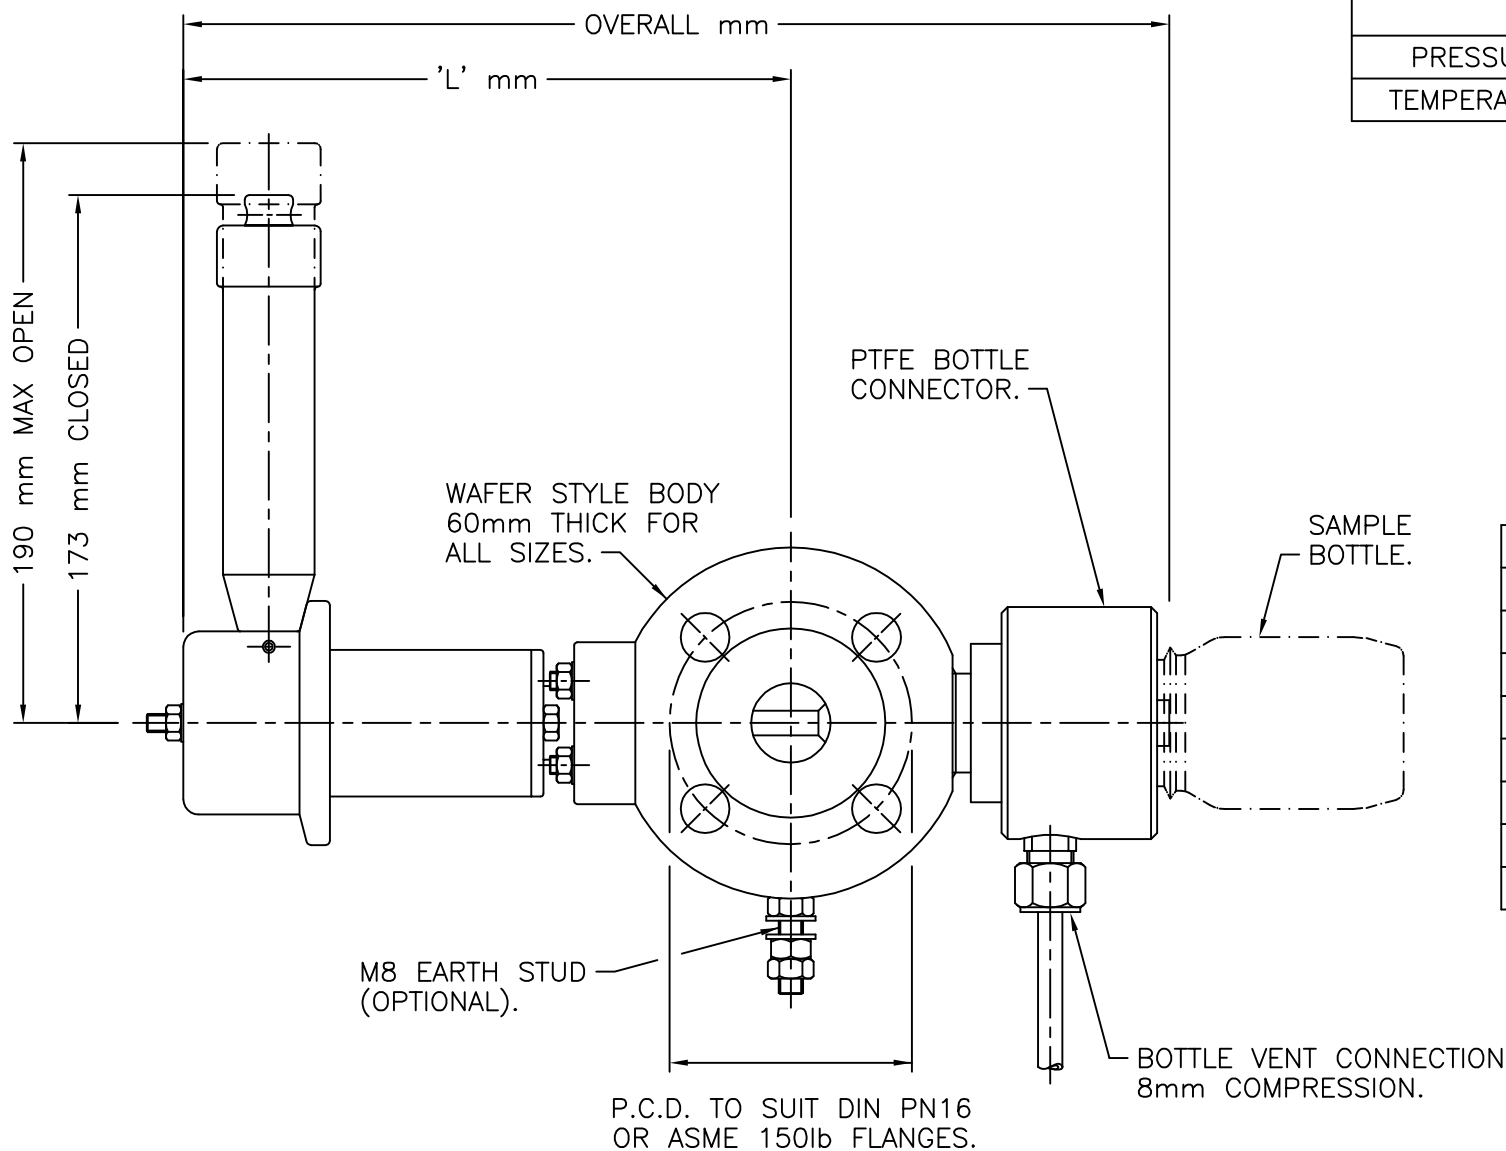

OPERATING DATA	VALVE TYPE	
	SD-IL-300 316L St/St	SD-IL-400 PFA LINED
PRESSURE	16 bar Max	10 bar Max
TEMPERATURE	-29 to +200°C	-29 to +180°C

NOTE:
1/2" NB VALVE ONLY
AVAILABLE AS UNLINED
(SD-IL-300) VARIANT

6"ASME 150lb	288 mm	497 mm
4"ASME 150lb	259 mm	442 mm
3"ASME 150lb	244 mm	412 mm
2½"ASME 150lb	237 mm	397 mm
2"ASME 150lb	226 mm	374 mm
1½"ASME 150lb	218 mm	360 mm
1"ASME 150lb	200 mm	323 mm
¾"ASME 150lb	200 mm	321 mm
½"ASME 150lb	195 mm	318 mm



THIS DRAWING IS DRAWN USING THIRD ANGLE PROJECTION



CRP
Todmorden Road
Littleborough
OL15 9EG
www.crp.co.uk

Tel: +44(0)1706 756400 Fax: +44(0)1706 379567

PROJECTION DRG. PRACTICE TO B.S.308
DIMENSIONS IN mm U.O.S.
UNSPECIFIED TOL. ±3

DRAWN	TB	04/2/08
APP'D	.	04/2/08
SCALE	NTS	A3

TITLE: G.A. SD-IL-300/400 ACTUATED SAMPLING DEVICE WITH BOTTLE ADAPTOR	
PART NO:	
DRG.NO:	SDD368
REV.	02

02	TEMPERATURE RANGE	PTB	19.9.20
REV	CHANGE	SIG	DATE